NEW PRODUCT

900 Series Super-LED[®] Scenelight

HIGH INTENSITY 90° GRADIENT OPTI-SCENELIGHT



FEATURES

- 24 diode lighthead with a unique (patent pending) internal and external optic design for superior scenelighting without angle brackets.
- Surface mounted, die-cast housing eliminates body cut-outs on your vehicle.
- Internal and external optical lens design provides more evenly distributed, functional light.
- LED lighting out performs HID, utilizing brighter color temperatures. LED lighting is more reliable, eliminating the high cost of replacing H.I.D. lamps and ballasts.
- 6500 Lumen output.
- Draws 6 amps at 12.8 VDC.
- Super-LEDs are low amperage, low operating temperature.


- Instant "On" with no warm up and no high current voltage spikes on start up.
- Conformal coated internal electronics.
- Supplied 9EFlange trim ring.
- LED lights do not emit ultra-violet radiation that attracts insects in nighttime operation.
- Certified to meet AMD Standard 024 for perimeter illumination.
- HDP[®] Heavy-Duty Professional five year warranty.



Wire entry seal to body



900 Series Super-LED[®] Scenelight

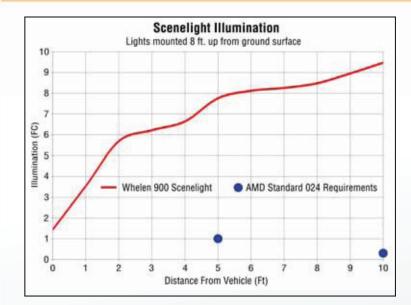


MODEL







Flange dimensions 10-7/8" (276mm) L x 8" (203mm) H x 3/4" (19mm) D

DIMENSIONS



Whelen Engineering reserves the right to upgrade and improve products without notice. © 2010 Whelen Engineering Company, Inc. Printed in U.S.A. NASCAR® is a registered trademark of the National Association for Stock Car Auto Racing, Inc Code No. 12397A - 08/25/10



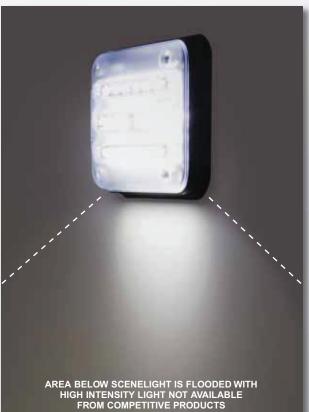



51 Winthrop Road Chester, Connecticut 06412-0684 (860) 526-9504 • Fax: (860) 526-4078 www.whelen.com

American Employees, American Manufacturing, American Pride!