




# LATITUDE™ WARNING LIGHTING

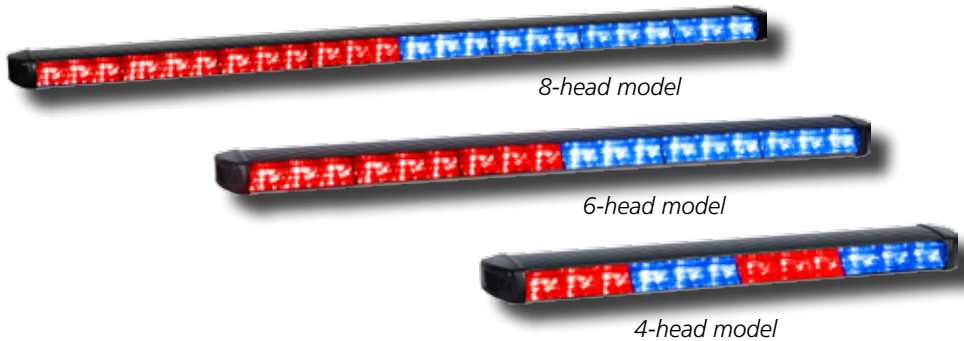

## A complement to any warning solution

The Latitude™ flashing light series offers the flexibility needed to complement any warning solution. Equipped with three-LEDs per position and Federal Signal's Solaris® LED reflectors, the Latitude delivers an impressive optical performance for your vehicle. This warning light is available in 4-head, 6-head and 8-head models suitable for many vehicle applications.

## Warning capabilities

Latitude flashing models are programmed with 10 eye-catching flash patterns plus one test pattern. These flashing models are available in LED colors of Red, Blue, White or Amber.

## A simple concept you can depend on

Built to last, the Latitude was engineered with ROC (Reliable On-Board Circuitry™) technology. ROC eliminates failure points found in similar warning products.

Available for both interior and exterior applications, this sensible warning light is built with an innovative co-extrusion, polycarbonate housing to provide moisture resistance. Both interior and exterior brackets are available. The Latitude Series comes with Federal Signal's standard five-year warranty.

## > Features

- Solaris® LED reflector technology
- ROC (Reliable Onboard Circuitry)™ technology
- Available in 4-head, 6-head, or 8-head models
- Three LEDs per position
- Interior and exterior mounting brackets
- Innovative co-extrusion, polycarbonate housing provides moisture resistance
- 10 flash patterns plus 1 test pattern



## > How to Order

### 4-head Flashing Models

<b>SL4F-2R2B</b>	(2) Red, (2) Blue (alternating) R-B-R-B
<b>SL4F-RB</b>	(2) Red, (2) Blue, R-R-B-B
<b>SL4F-R</b>	(4) Red, R-R-R-R
<b>SL4F-R</b>	(4) Red, R-R-R-R
<b>SL4F-B</b>	(4) Blue B-B-B-B
<b>SL4F-2R2W</b>	(2) Red, (2) White (alternating) R-W-R-W
<b>SL4F-2B2W</b>	(2) Blue, (2) White (alternating) B-W-B-W
<b>SL4F-A</b>	(4) Amber, A-A-A-A, (does not include directional functions)

### 6-Head Flashing Models

<b>SL6F-RB</b>	(3) Red, (3) Blue, R-R-R-B-B-B
<b>SL6F-R</b>	(6) Red, R-R-R-R-R-R
<b>SL6F-B</b>	(6) Blue, B-B-B-B-B-B
<b>SL6F-A</b>	(6) Amber A-A-A-A-A-A, (does not include directional functions)

### 8-Head Flashing Models

<b>SL8F-RB</b>	(4) Red, (4) Blue, R-R-R-R-B-B-B-B
<b>SL8F-R</b>	(8) Red, R-R-R-R-R-R-R-R
<b>SL8F-B</b>	(8) Blue, B-B-B-B-B-B-B-B
<b>SL8F-A</b>	(8) Amber, A-A-A-A-A-A-A-A, (does not include directional functions)
<b>SL8F-BA</b>	(6) Blue, (2) Amber, B-B-A-B-B-A-B-B

### Accessories and Kits

<b>320310</b>	Flush (vertical surface) mount
<b>320320</b>	Lightbar or rear deck mount
<b>320330</b>	System mount
<b>320340</b>	Universal mount
<b>320350</b>	Foot adapter mount

	4-Head	6-Head	8-Head
Specifications			
Voltage	12.8 VDC		
Amp Draw (total)	2 Amps	3 Amps	4 Amps
Operating temp	-22°F to +149°F (-30°C to +65°C)		
Dimensions			
Height	1.13 in (2.86 cm)	1.13 in (2.86 cm)	1.13 in (2.86 cm)
Length	16.9 in (42.9 cm)	24.2 in (61.5 cm)	31.8 in (80.5 cm)
Depth	2.63 in (6.67 cm)	2.63 in (6.67 cm)	2.63 in (6.67 cm)
Ship Weight			
	3.1 lbs (1.4 kg)	3.8 lbs (1.7 kg)	4.0 lbs (1.8 kg)

